

Conergy SunCentric P Pool Pump

SunCentric P uses solar-electric power to pump water. It is cost-effective for swimming pools, especially where utility rates (or daytime peak rates) are very high.

A pool pump is often one of the largest electrical loads in a home. A solar pump is practical because the need for filtration is greatest during sunny weather. It is perfect for pumping through solar heat collectors because the circulation requirement corresponds with solar intensity.

Applications

- | Swimming Pools
- | Agriculture
- | Fountains, waterfalls
- | Pond management

Benefits

- | Array-direct operation
- | Brushless motor
- | AC backup optional

Features


- | glass-filled polycarbonate construction
- | resistant to chemicals, salt and sunlight
- | withstands temperatures to 175°F
- | quick-disconnect unions
- | large basket strainer with clear cover
- | self-priming centrifugal design
- | retains water to resist dry-run damage
- | easily serviceable, with all reusable o-rings
- | industrial standard carbon-ceramic shaft seal
- | ETADRIVE® brushless motor is ultra-efficient and maintenance-free
- | ETADRIVE® soft-start controller optimizes motor efficiency under all conditions

Pipe fittings

- | ABS quick-disconnect swivel unions, slip-connect to ABS or PVC pipe using ABS/PVC cement
- | Intake: 2"
- | Outlet: fits either 1 1/2" or 2"

Solar array (approximate):

- | 340 watts: 34 square feet
- | 500 watts: 50 square feet
- | 600 watts: 60 square feet

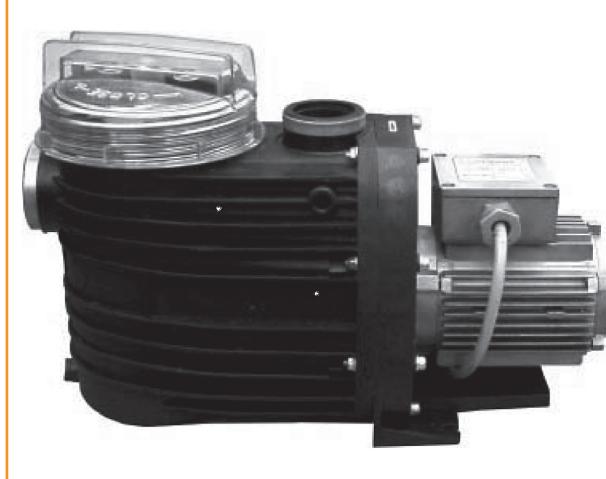

Dimensions (inches)

- | Controller dimensions: 16 X 12 X 6.5
- | AC power pack (optional): 16 X 12 X 6.5

Shipping weight (approx.)

- | pump and motor: 24 lbs (11 kg.)
- | controller: 16 lbs (8 kg.)
- | AC power pack: 33 lbs (15 kg.)

Accessories

- | Fixed PV Array Rack (specify pole-top, adjustable angle roof/ground mount, or fixed-angle roof/ground mount)
- | Tracking PV Array Rack (pole-top only)
- | Ground Fault Interrupt (required by NEC when the PV array is installed on a roof)
- | Solar array combiner box
- | Low-water probe (prevents dry run if water source level drops)
- | AC Power Pack. If backup power is required, the AC Power Pack will power the pump from utility service or a generator. The flow will be equal to the 600 watt solar array specifications shown below. Input: 115/230 VAC, 6/3A maximum

Suction capacity

- | 10 vertical feet above water source, at sea level (subtract 1 foot per 1000 ft. elevation)

Swimming pool application requirements

Piping

Low friction is critical to performance. 2" is preferable. Avoid sharp 90° bends, especially in 1.5" pipe.

Filter type

There are three common types of filters: (1) CARTRIDGE filter is best. It works well at low and variable flow rates, and has low pressure-drop, (2) SAND filter works well at low and variable flow rates, but check the specifications for pump requirements for backwashing. The solar pump (by itself) may not produce sufficient backwash. (3) DIATOMACIOUS EARTH (DE) filter does not work well below a specific pressure, and may not function fully with a solar pump.

Automatic Pool Cleaners

This pump may not be adequate to operate a pool cleaner (pool sweep) that depends on the filter pump. If a conventional pool pump is not installed as a backup, a pool cleaner booster pump or a selfdriven cleaner can be used. This pump will not operate an in-floor cleaner with pop-up jets.

Manufacturer's warranty

Pump, motor and controller is 2 years, solar modules 20 or 25 years. It is the customer's responsibility to determine suitability for any particular use.

Technical data Conergy SunCentric P Pool Pump:

SUNCENTRIC P INTEGRATED SYSTEMS

Total Dynamic Head feet	or Back Pressure psi *	Solar Array peak watts	Performance with Fixed Array		Performance with Tracking Array		peak flow GPM
			gallons per day	max. pool volume **	gallons per day	max. pool volume **	
6.5	3	340	17,600	25,100	26,600	38,000	46
		500	24,300	34,800	36,800	52,600	59
		600	27,500	39,300	39,600	56,000	63
13	6	340	11,100	15,900	16,900	24,200	37
		500	17,900	25,600	27,000	38,600	52
		600	21,100	30,200	31,700	45,300	56
20	8.5 *	340	6,400	9,200	9,800	14,000	29
		500	12,100	17,200	18,200	26,000	44
		600	16,100	22,900	24,300	34,700	50
26	11	500	6,700	9,500	10,100	14,400	33
		600	10,300	14,800	15,700	22,400	42

* 8 PSI is typical back pressure in a system that is sized according to this selection table. Low-friction (2") piping and a large filter can reduce it further.

** Max. pool volume is for typical residential swimming pools, based on a turnover of 70% of pool volume per day. For faster turnover, select a higher volume system. This is recommended for cases of intensive use, or in a dusty or cloudy climate, or if the solar array will be obstructed during a portion of the day.

Daily volume is based on solar irradiation of 6 peak sun hours per day. Daily volume and flow are based on 17% degradation of the array output due to heat, dirt, and tolerances.

Available from: